

FIG.1

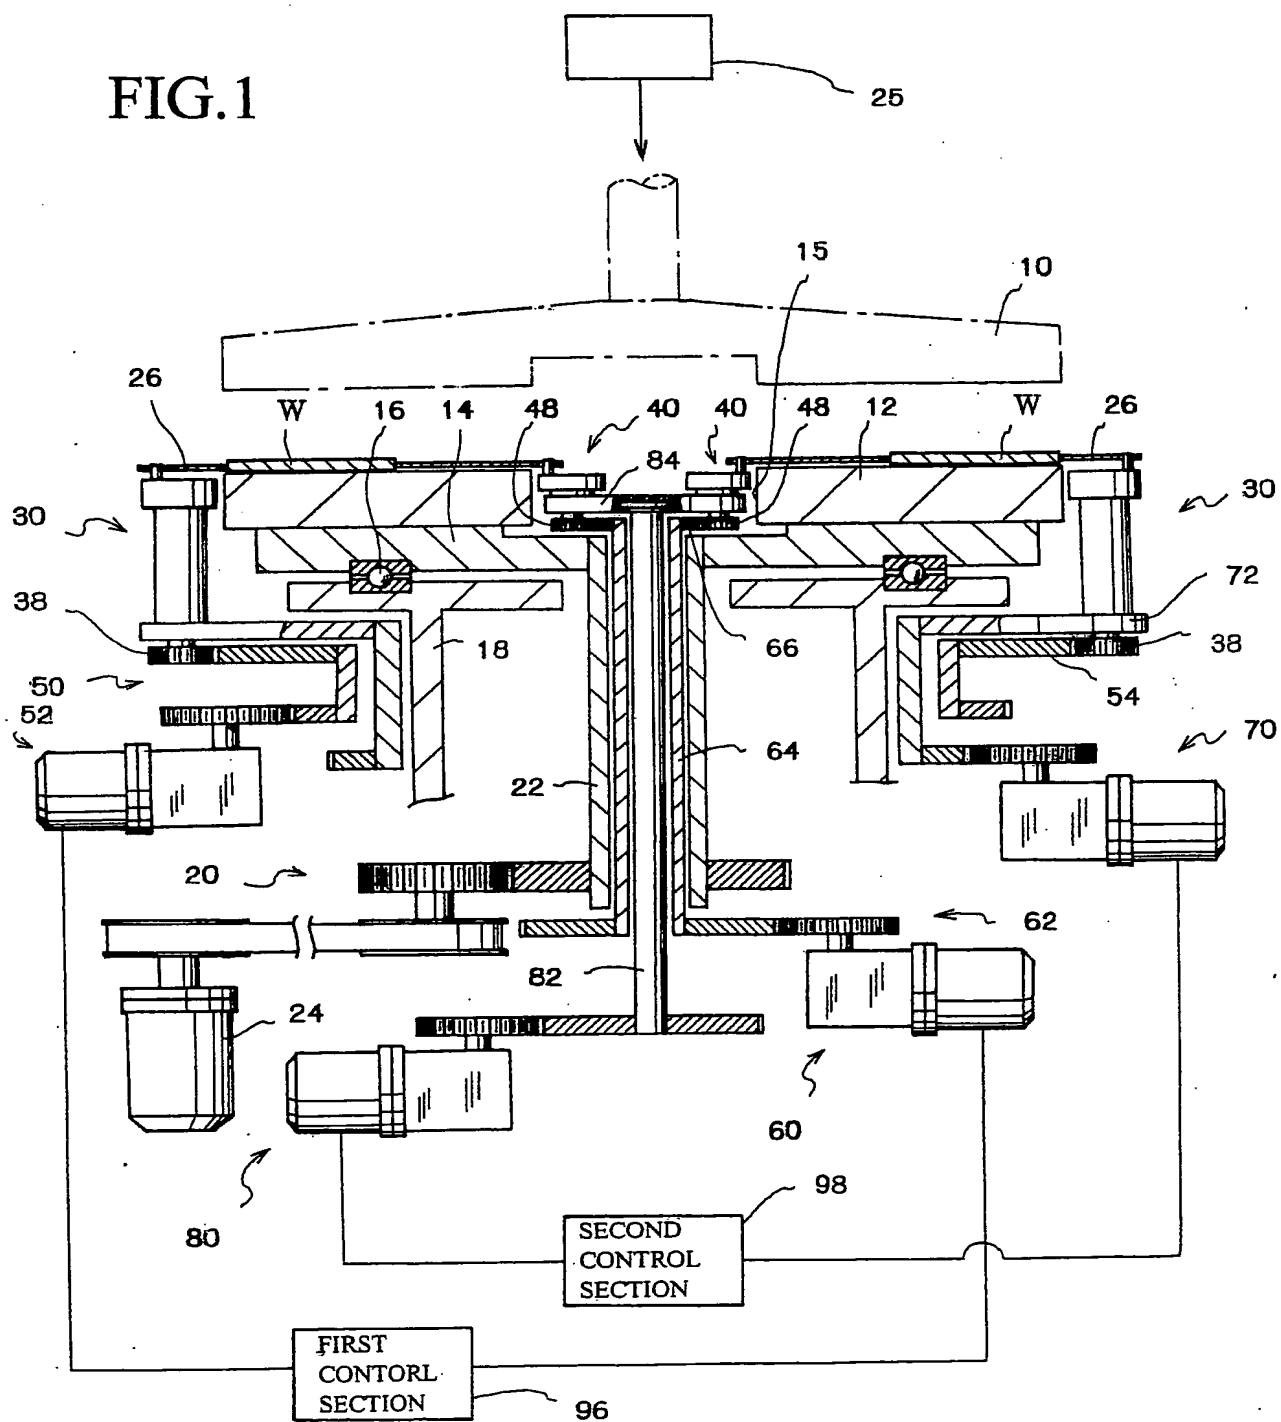


FIG.2A

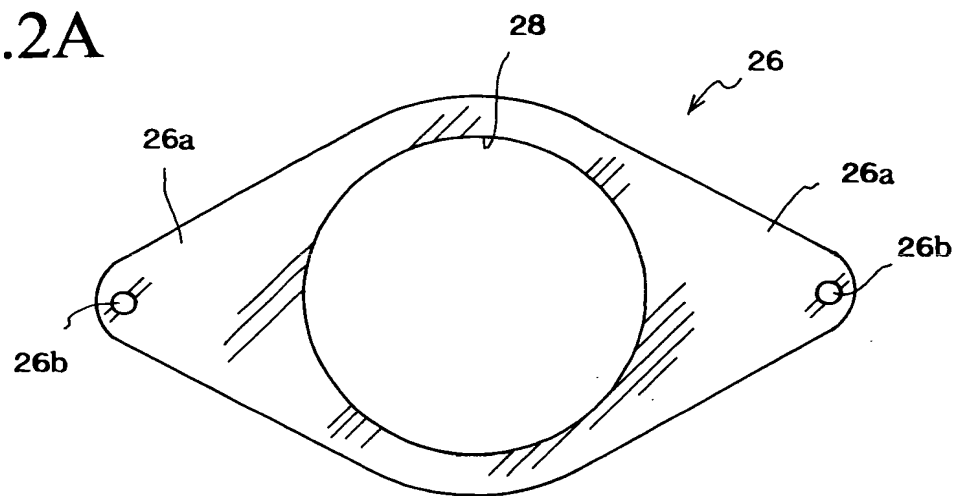


FIG.2B

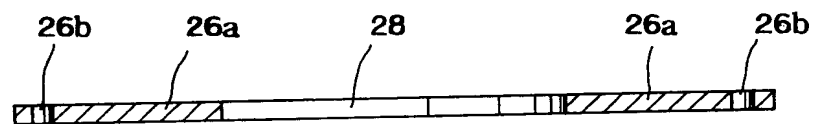


FIG.5

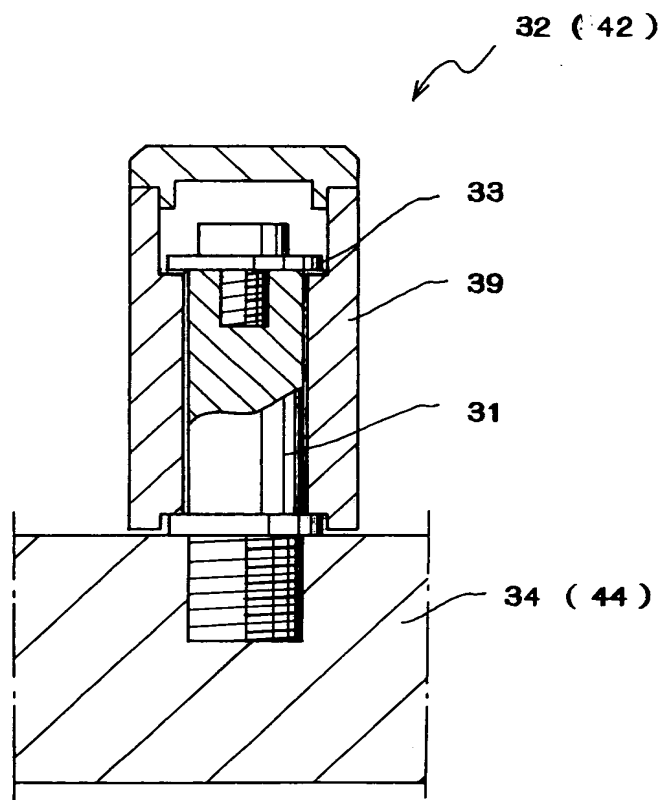


FIG.3

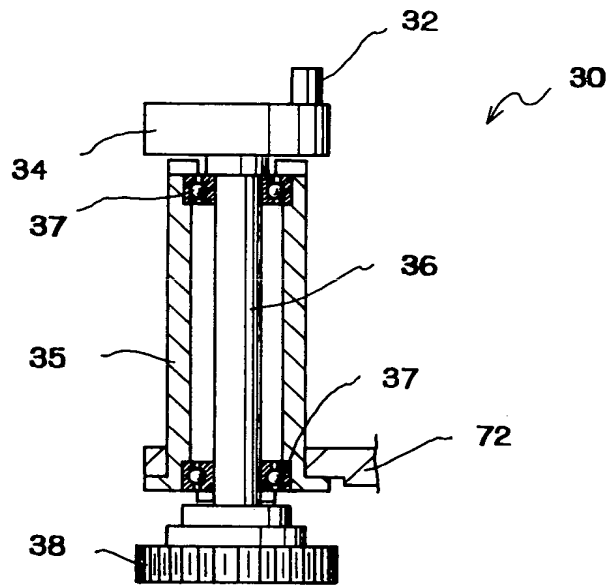


FIG.4

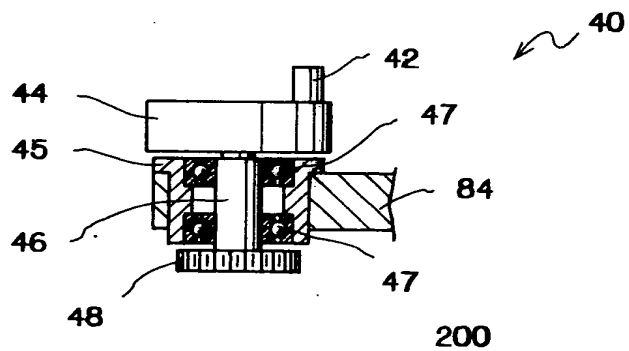


FIG.17
PRIOR ART

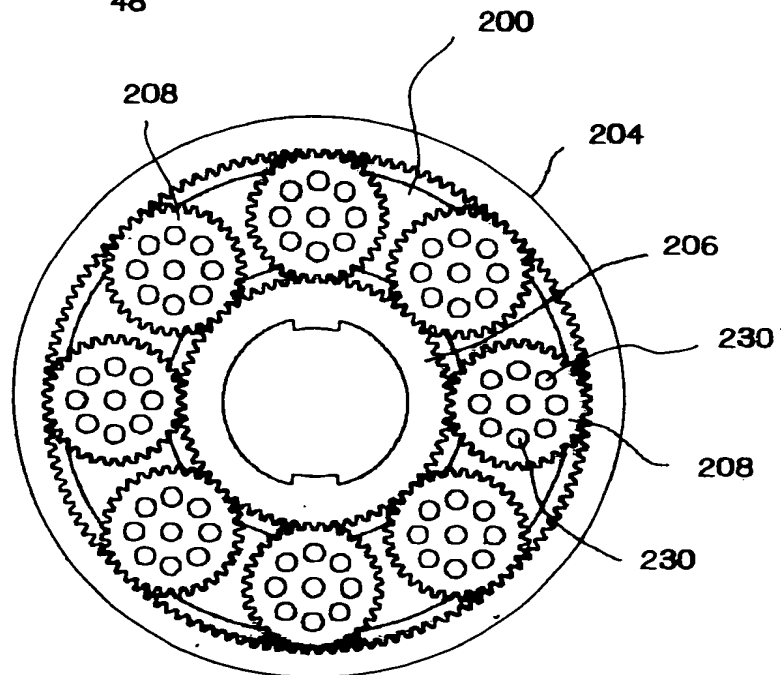


FIG.6


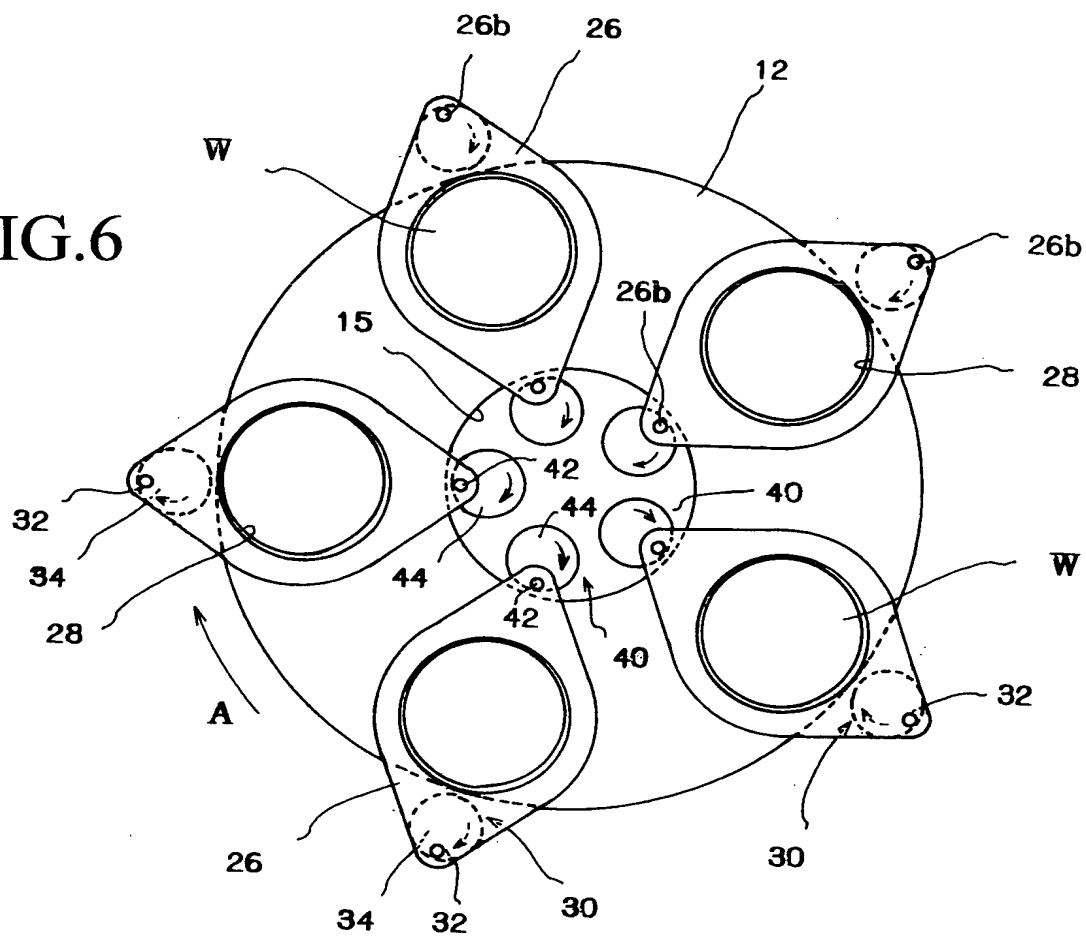


FIG.16
PRIOR ART

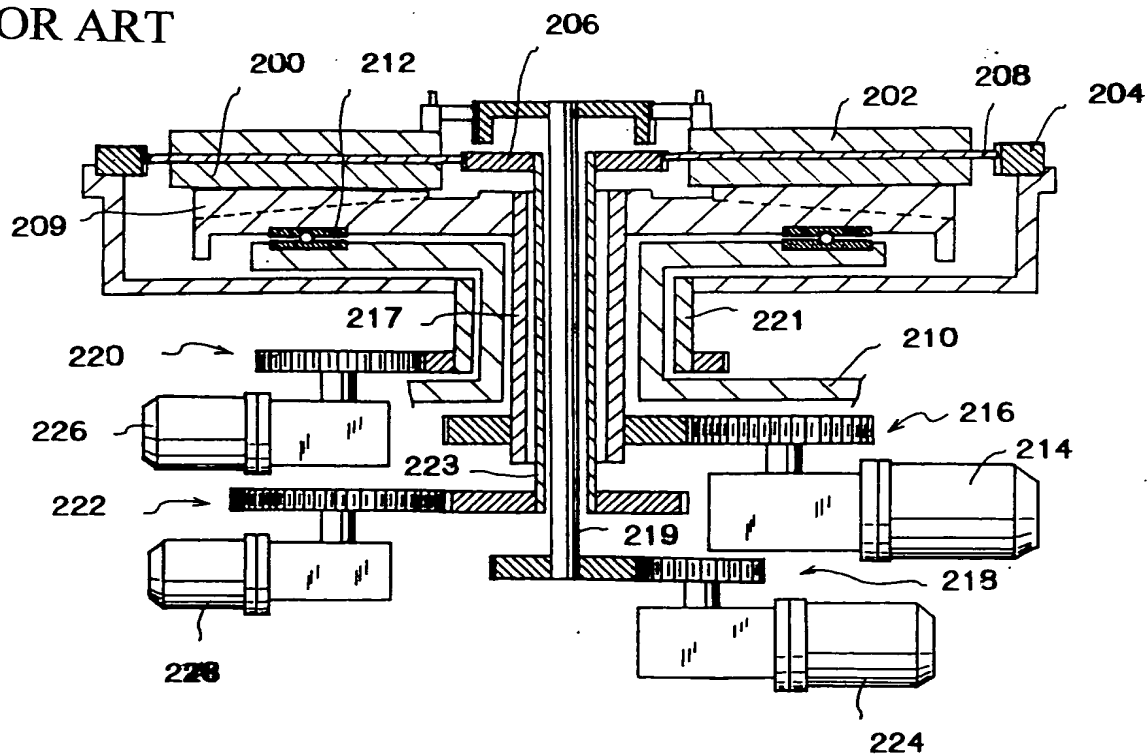

[illegible]

FIG.8

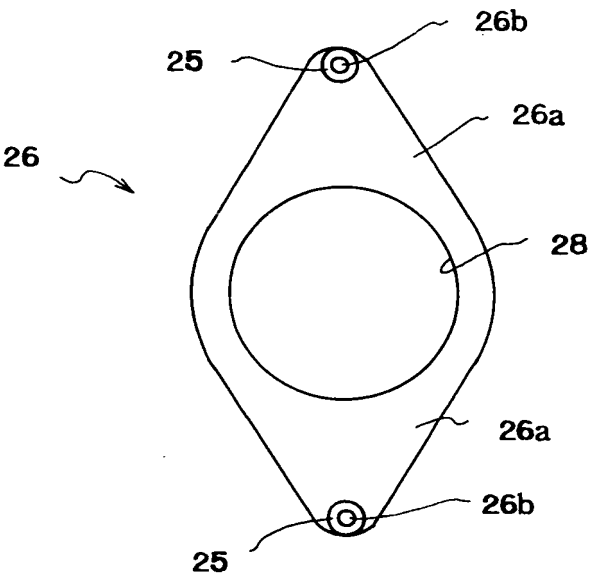


FIG.9A

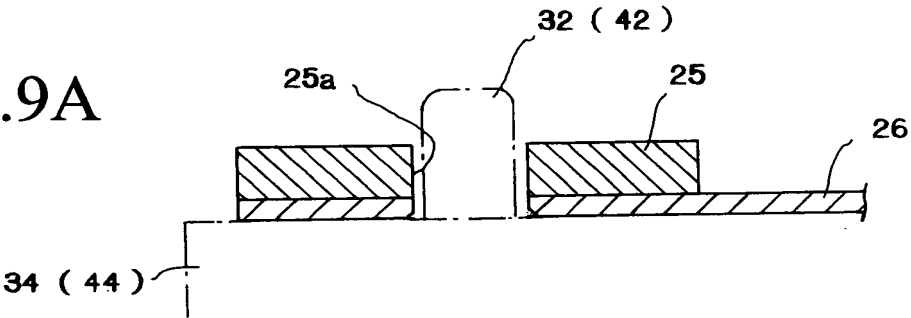


FIG.9B

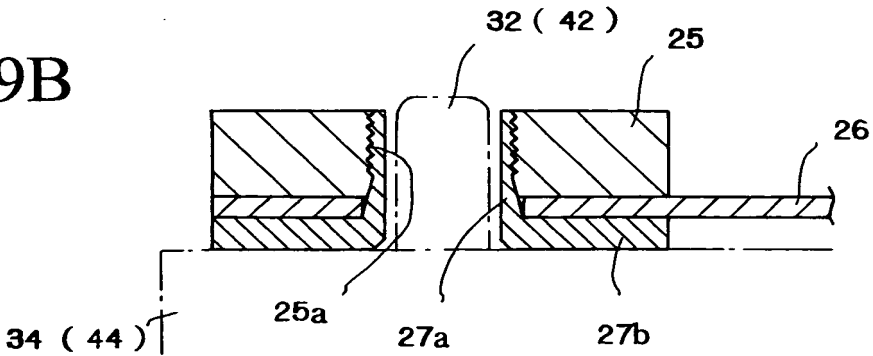


FIG.10

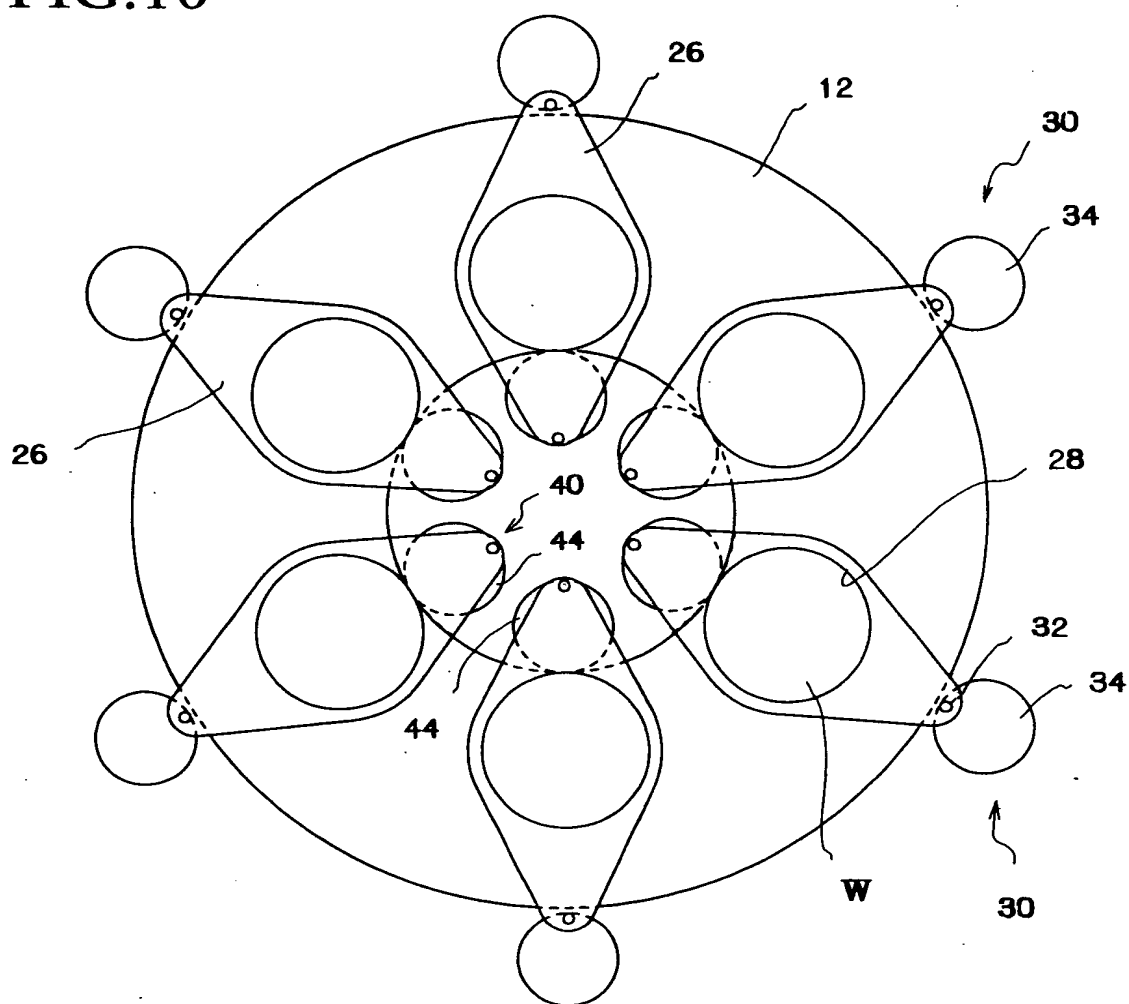


FIG.11

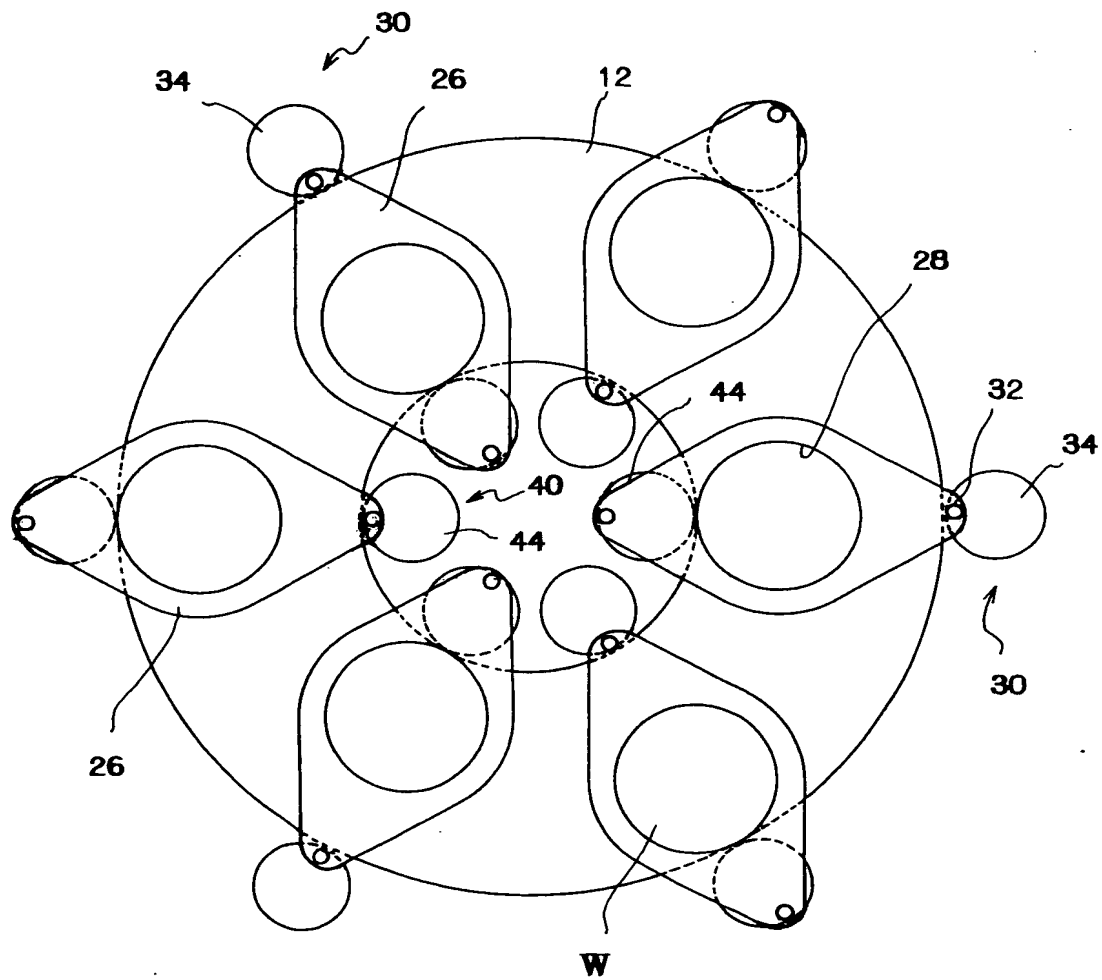


FIG.12A

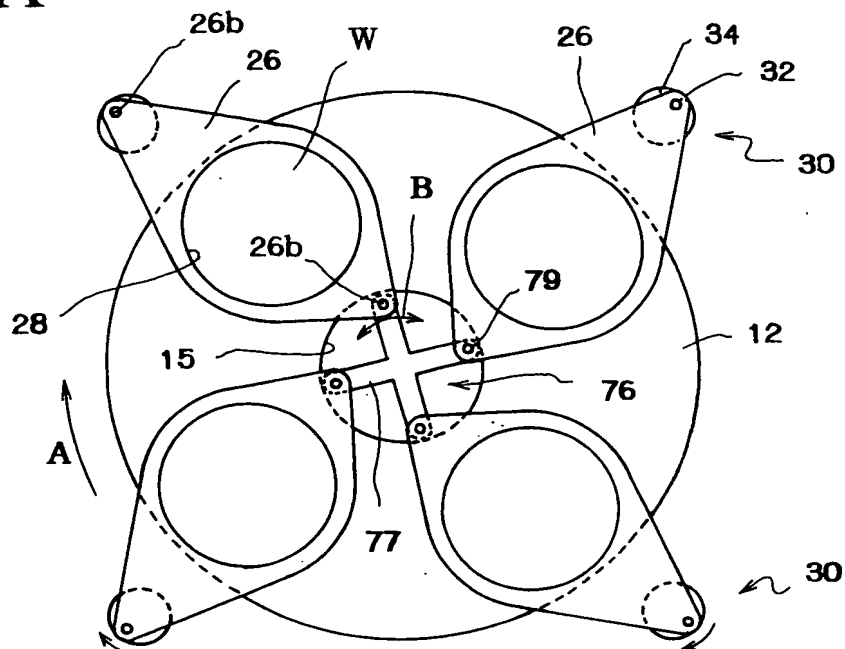


FIG.12B

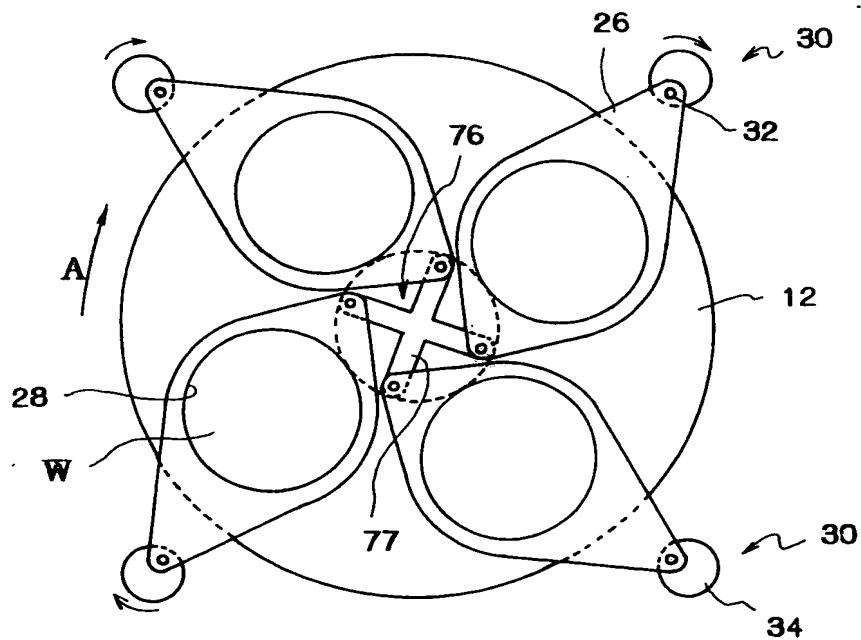


FIG.13A

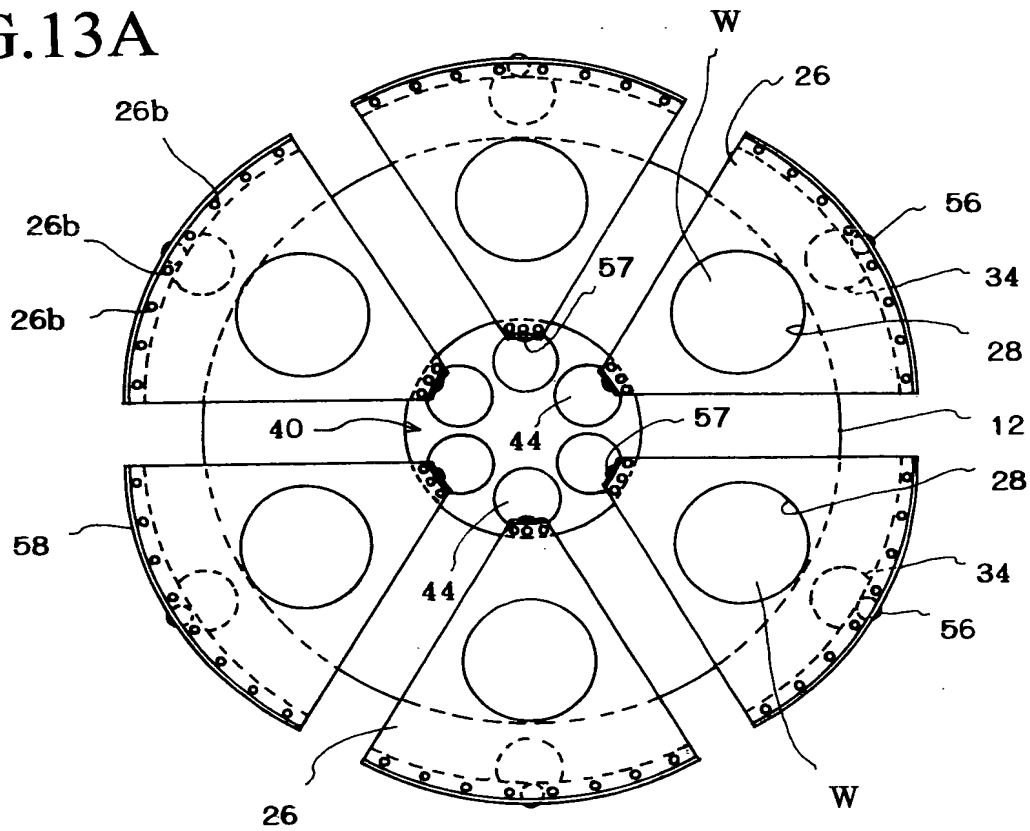


FIG.13B

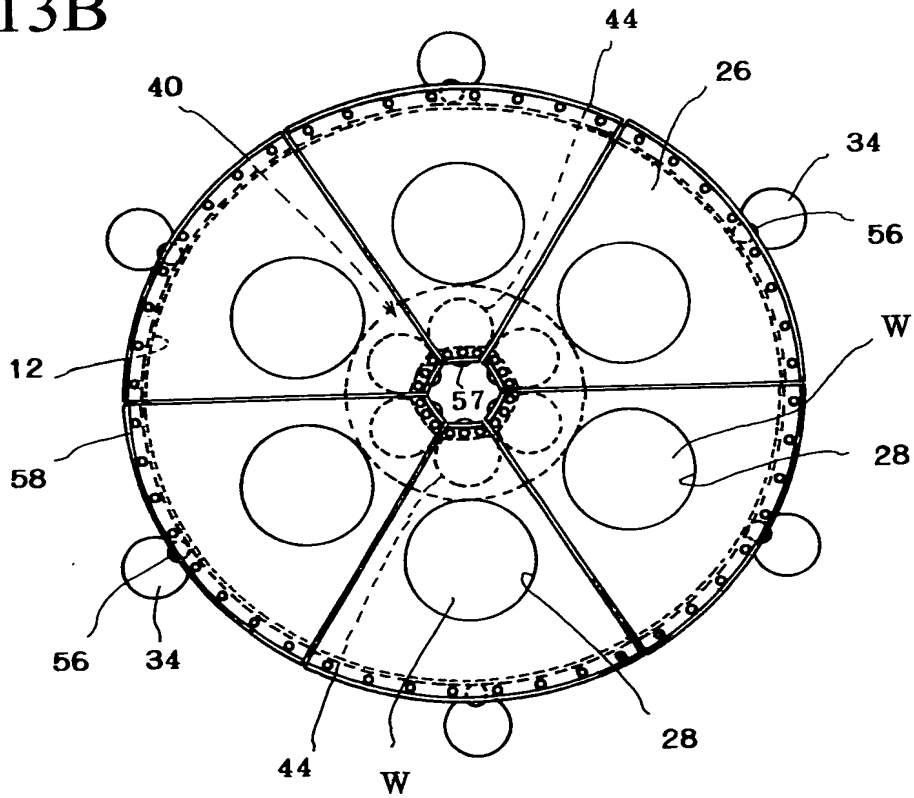


FIG.14

FIG. 14 is a perspective view of a circular device. The device has a central circular opening 28. A curved outer edge 26 is defined by a dashed line 34. Along this edge, there are several small circular features 26b, some of which are labeled 32. A central circular feature 44 is shown with a dashed line 57 and a solid line 59. A curved line 42 is also indicated. A small circular feature 56 is shown near the center of the device.

FIG.18
PRIOR ART

